

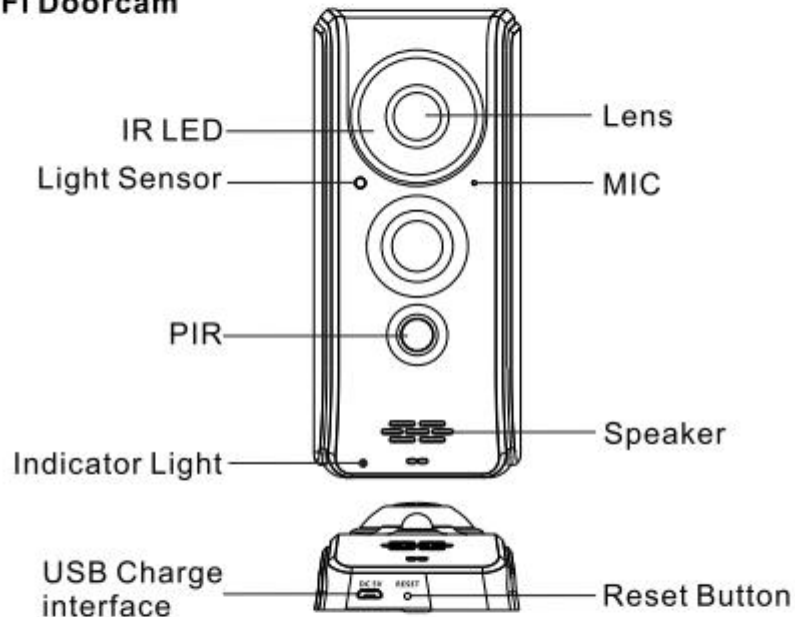
1. Packing List

Open the packing box, please check whether the packing list is complete and the items are in good condition.

Packing list	Qty	Unit
Doorcam	1	pc
Indoor unit (Optional)	1	pc
Screw	1	bag

2. Product Description


WiFi Doorcam



IR LED	Infrared light
Light Sensor	Used to detect environmental brightness value
MIC	Audio capture
Button	The doorbell button
PIR	To detect visitors
Lens	Video image capture
Speaker	Issue voice prompt and voice intercom
USB Charge Interface	When the battery is low, no need to take out the battery, you can connect a 5V power adapter to charge the battery directly
Reset Button	Press 2~5 seconds to restore factory settings

- Indicator Light**
- Red light flashes 2 seconds every 2 seconds** : The device is waiting for WiFi connection.
 - The light is red**: The user joined to the device hotspot successfully.
 - The blue light flashing for 0.5 seconds every 0.5 seconds**: The device is connecting to the router .
 - The light is blue**: Device connected to the router.

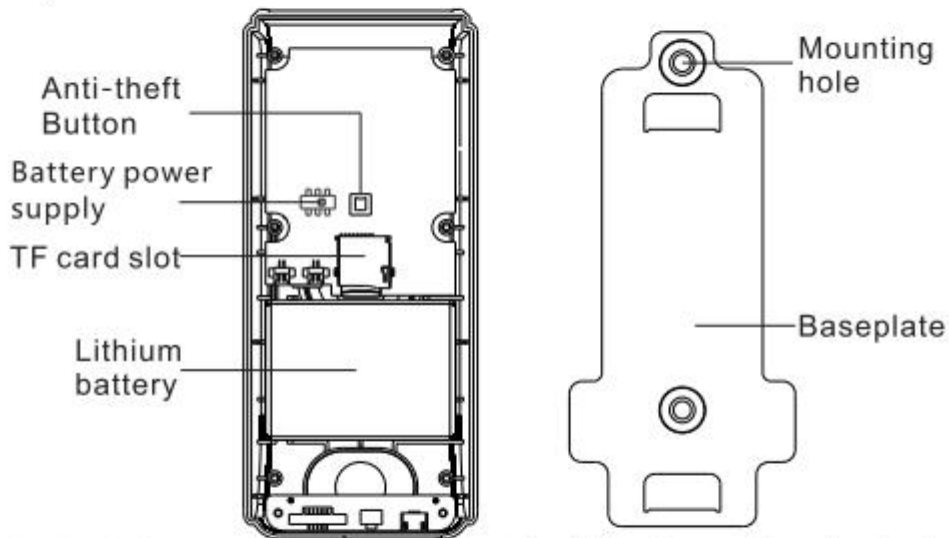Open the back cover of the doorbell



- Anti-theft Button** When someone forcibly takes the doorbell, anti-theft button will trigger alarm, and both the App and the doorbell will make alarm sound.
- Battery power supply** Please turn on the switch on first time.
- TF card slot** Is used to insert TF card
- Lithium battery** Power supply
- Mounting hole** Fit the support on the wall with the mounting screws for the mounting kit.
- Baseplate** The holder of the fixed equipment

3. Software download

- ①Go to www.eye4smart.com to download the App.
- ②Search "Eye4Smart" in APP Store, Android market like Google play etc.
- ③Scan the QR code below to download.



4. Register

Select the "sign up" on Android/iOS client end, complete the sign up by inputting username and pass code.

5. Add Device

There are two methods to add the doorbell to smartphone , they are as follows:

Method One: Scan QR code

Step 1: Login the APP, click on "+" on the top right corner, choose 'Scan to add', scan the QR code on the doorbell's sticker. Please make sure the light on the doorbell turned red and flash every 2 seconds. Tap the 'Red light flash every 2 seconds' and go next

Note: If the light did not turn red or flash every 2 seconds before the adding, please reset the doorbell to factory default.

Reset method : while the device is awake, press the green reset key at the rear of the doorbell for 2~5 seconds.



Step 2 :The connection operation steps of different mobile platforms are as follows:



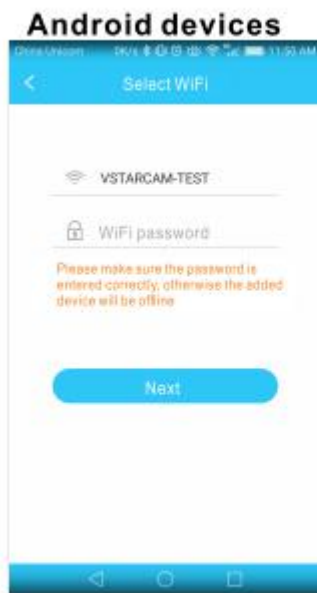
Android devices

To add the doorbell for the first time, please select the WiFi that the phone connected and input the WiFi password, then go to next step.





IOS devices

To add the doorbell for the first time, please follow the guide on the page, manually connect to the doorbell's hotspot @Doorbell-xxxxxx, (You can go to "settings-Wlan/WiFi, to find out the doorbell WiFi and connect to it, no need to put in the password), after connected to it, please go back to the APP, select the home WiFi, input the WiFi password and click to go to next step.




After finish the above settings of different phones, please follow the steps below:

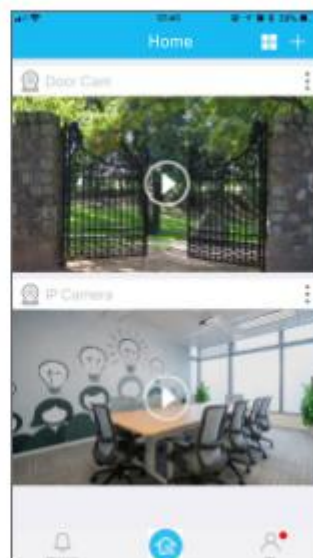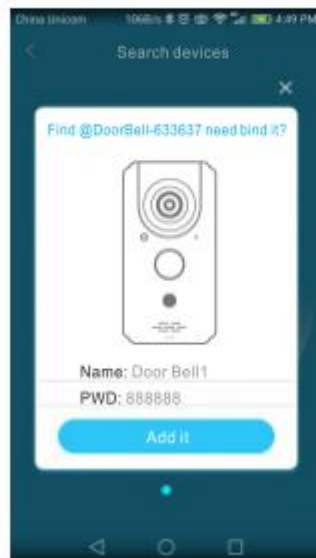The APP will start searching the doorbell, after the doorbell has been detected, the bind page will pop up, click on 'Add it' to add the doorbell. After successfully added, the doorbell will be shown in the home page of the APP and the light will be solid blue.




Method Two: Others

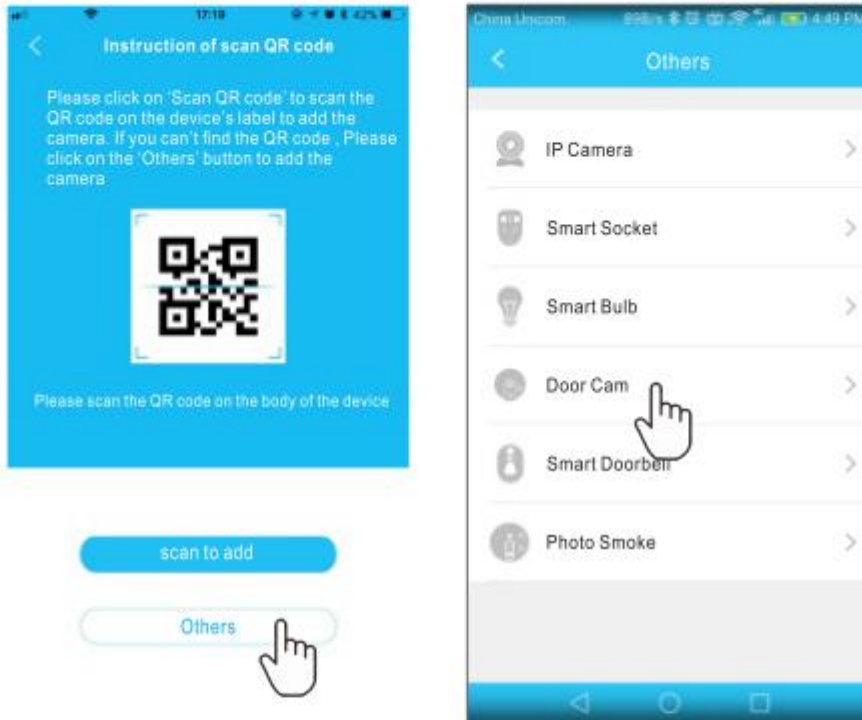1) if it failed to add the doorbell via scan QR code, you can return to the home page of the APP, click on '+' button on the top right of the page, choose 'Others' → 'Door Cam'



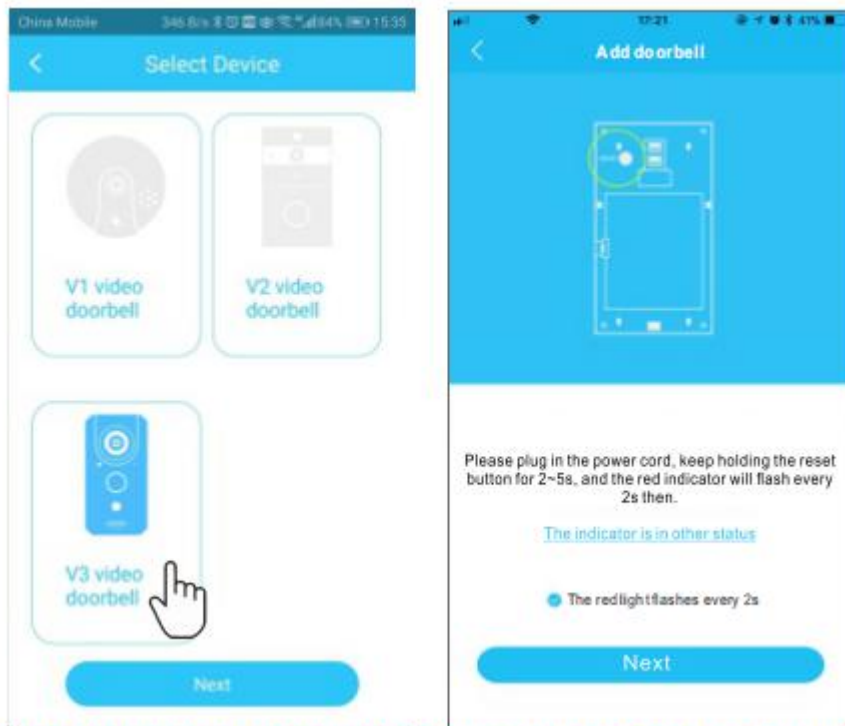2) Select the corresponding doorcam model, go next. Please follow the guide in the page, make sure the light turned red and flash every 2 seconds. Tap the 'Red light flash every 2 seconds' and go to next step.



Then please refer to the step 2 in Method One to finish the doorbell adding.

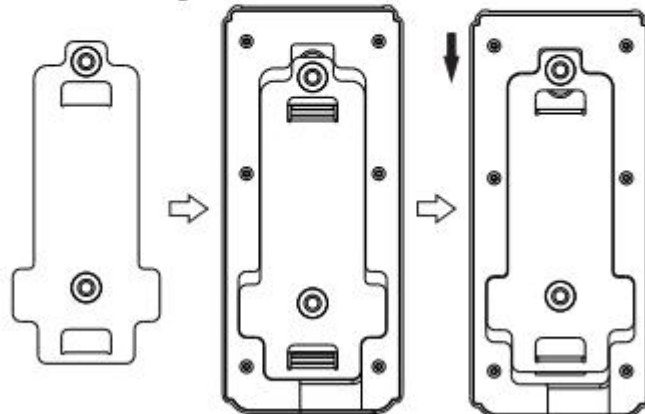
6. Install instructions

Note: Please connect wifi network before installing the device.

Step 1: install baseplate


Step 2: Align the fuselage with the hanger;

Step 3: Push the fuselage down



7. Indoor unit

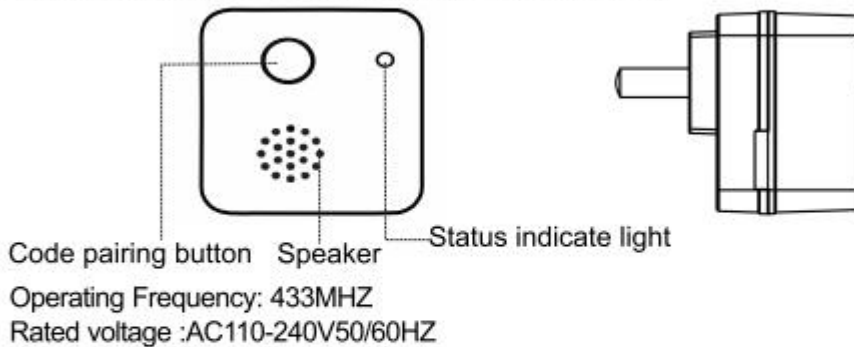① Appearance introduction of Indoor unit




②Code pairing and Usage

1) After setting up the wireless doorcam, please plug in the indoor unit. The doorcam and the indoor unit have already been matched when out of factory , when pressing the doorcam, the indoor unit will make a dingdong sound.

2) If the doorcam does not communicates with the indoor unit please re-pair them.

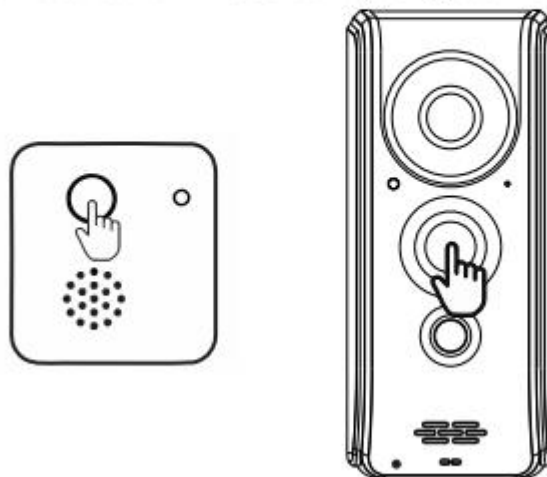
Code pairing method : While both the indoor unit and the doorcam are powered, short press the button on the indoor unit (the indicator light will be on and then off), then short press the doorcam, the indoor unit will issue dingdong sound.




8. Use and share

① When nobody pressed the doorbell or PIR is off, and no motion for about 30 seconds, the doorcam will enter sleep mode, power consumption will be the lowest.

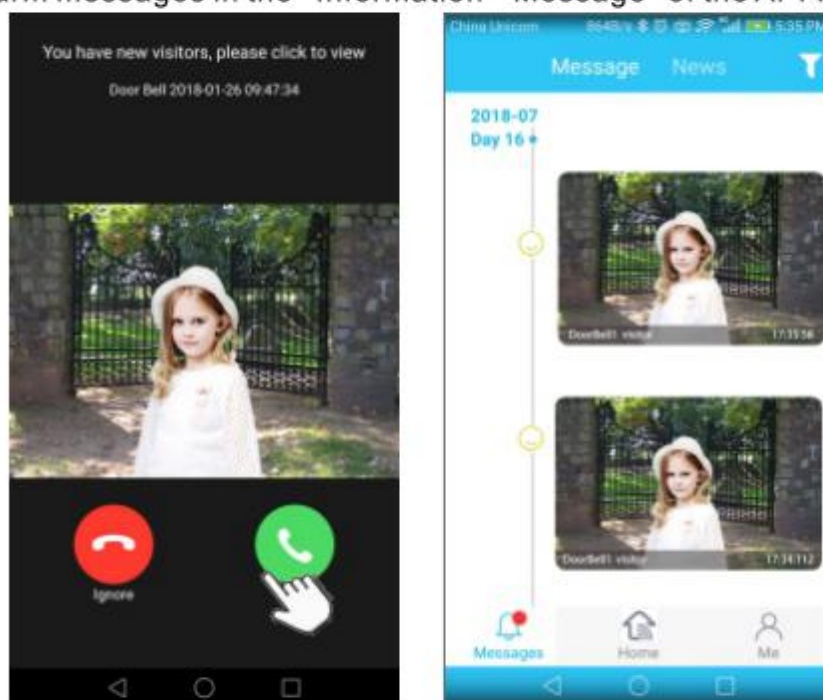When visitors press the doorbell, or the PIR is opened and detected visitors, the doorbell will be awakened, trigger alarm and take a snapshot, push it to the mobile phone. Meanwhile, the doorcam will issue doorbell sound. You can also check the alarm messages in the 'Information→Message' of the APP.



② In the home page of the APP, tap the  on the top right of the doorbell, go to the 'Settings' of the doorbell. We can open the ultra low power consumption function. **Please refer to figure 2.**


③ Click on the 'Alarm', we can enable the PIR. You can open the PIR and alarm push, set the sensitivity of the PIR, choose notification way(client or email). When the doorcam detects visitors, it will wake up, triggers alarm, take snapshots and push it to the phone or pushes alarm messages to the email.

Please refer to figure 3.






Figure 2

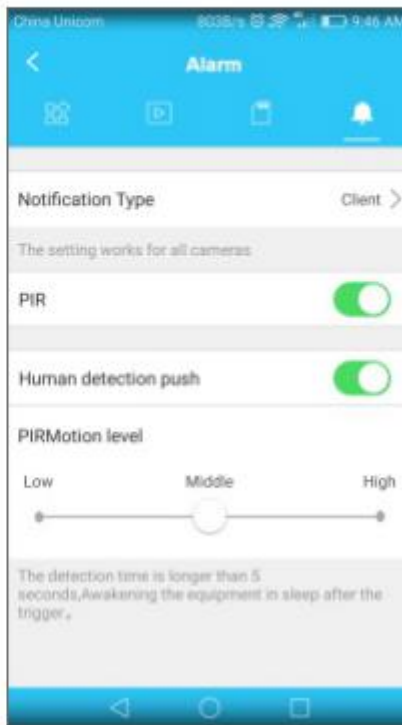

Figure 3



9. Function and features

-  HD wide-angle lens
 -  Support mobile phone remote fast wakeup
 -  2.4G WiFi connection
 -  High quality two-way instant audio with noise cancellation
 -  Support PIR motion detection, when someone hovered at the door, push the alarm information to mobile app immediately
-

FAQ

Q: Doorbell can't connect to WiFi

- A: 1. Please make sure the WiFi is in 2.4G band.
2. Make sure the red light is slowly flashing
3. The WiFi password should be less than 16 digits, and can not contain special characters, such as @ ¥ ! etc. , suggest you to make a password that contains only letters and number.
4. Please upgrade the APP to the latest version.

Q: The device is online and the alarm has been triggered, but can't get alarm message

- A: 1. Enable 'auto boot' for the APP
2. Allow the APP run in background.
3. Enable the notification function of the APP.
4. Close the 'Battery optimization' on the phone.

Q: What is the device's method of charging and discharging?

- A: 1. The device can work alone with 18650 batteries.
2. You can also recharge the built-in battery and it will also work.

Service

More help needed, please refer to our

FAQ: <http://www.eye4smart.com/faq.html>

Email: support@eye4smart.com

QQ: 2851561239