


1. Features

- Remote alarm when smoke happens at home.
- Alarm voice announcement and LED indicator flashing.
- Snapshot of smoke crisis sent to phone APP immediately
- Low power consumption, 1-year long standby.
- Free cloud storage.
- 95 dB alarm sound.
- Low-power status reminder.
- Easy to install.

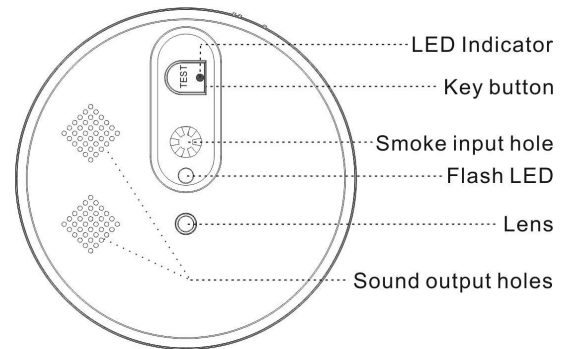

2. Parameters

Photo Resolution	800×600
Photo Format	JPEG
Image sensor	2 MP 1/4 inch OV CMOS image sensor
Lens	100°, F2.2 aperture
Transfer method	Wi-Fi 2.4G
Transmission distance	30m
Night vision mode	Support with 1pcs make-up light
Power supply	9V 600mAh lithium battery
Alarm horn	≥95dB
Alarm detection range	20m ²
Standby current	≤20uA
Operating current	≤200mA
Operating temperature	-10℃~+55℃
Alarm dimension	Φ115mmxH42 mm

3. Detector Functions

Key button	Click the button, photo would be taken and sent to APP, meanwhile alarm turn off after 3 sounds. Long press the button to go factory reset.
Smoke alarm	Test frequency 1 time per minute. Test no smoke, no notification, no uploading. Test smoke, photos would be sent to APP, 1pcs per 15 seconds, over after 6pcs or turned off by hand.
LED Indicator	Waiting for network connection: Red LED lighting blinker 1 time per 1 second. Network off: Red LED lighting blinker 1 time per 3 seconds. Network connecting: Red LED lighting turn off. Photo notification sent: Red LED lighting fast blinker 3 seconds and then turn off. Smoke alarm triggered: Red LED lighting fast blinker till APP end be turned off. Low-power alarm: Red LED lighting blinker 1 time per 10 seconds
Make-up lighting	Red LED lighting is on for 5 seconds.